

Technical Information

Tested to withstand force of (Joule)	10.000 J
Vehicle weight equivalent (kg)	5.000 kg
Vehicle equivalent speed (km/h)	7,2 km/h
Equivalent angle of impact	90°
Deflection zone	250 mm

Material Properties



Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

Environment

CO ₂ / m ³	20 kg
Recyclability	100%

Other

Standard Warranty	5 years
-------------------	---------

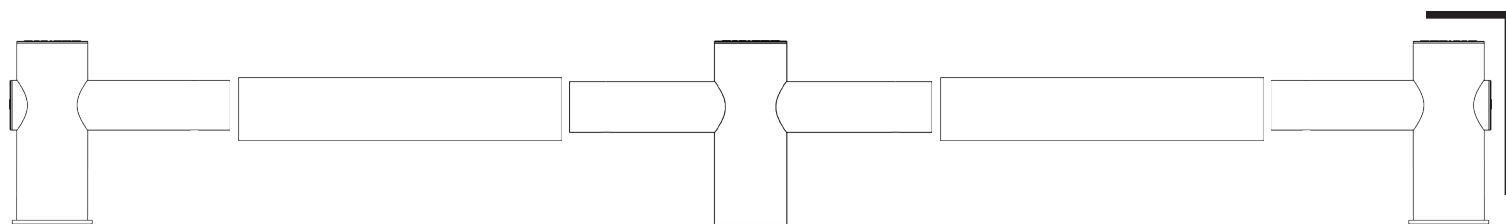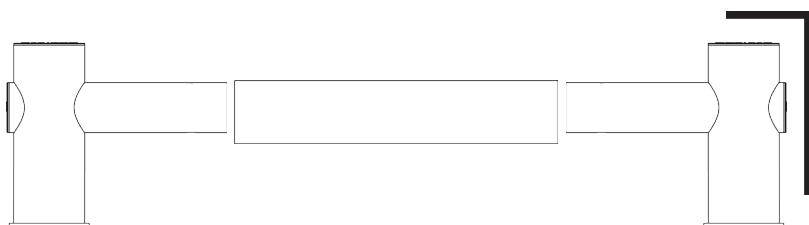

Art. No.	Description	Height	Weight
DFVB-E	End post	516 mm	12,8 kg
DFVB-M	Middle post	516 mm	13,6 kg
Art. No.	Description	Length	Weight
DFVB-R	Standard pipe Ø 160 mm	930 mm	2,6 kg
DVFVB-I	Standard pipe Ø 160 mm	Individual length 400 - 929 mm	2,6 kg/m

Article description	End post
Item number	DFVB-E
EAN	4250912311206
Customs tariff number	39269097




Height	516 mm
Width	225 mm
Length	650 mm
Diameter	200 mm
Deflection zone	250 mm

Net weight	12,8 kg
Material	Polyethylene
Color	Yellow (like RAL 1023 traffic yellow) / black
Indoor use	Yes
Outdoor use	Yes
Boreholes	4


Fixing	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
---------------	---

Fixing dimensions	M12X85
--------------------------	--------

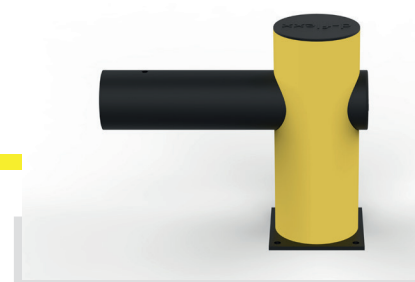

Material Properties

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°


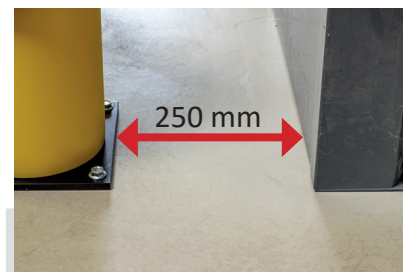


Environment

CO ₂ / m ³	20 kg
Recyclability	100%

Other

Standard Warranty	5 years
-------------------	---------

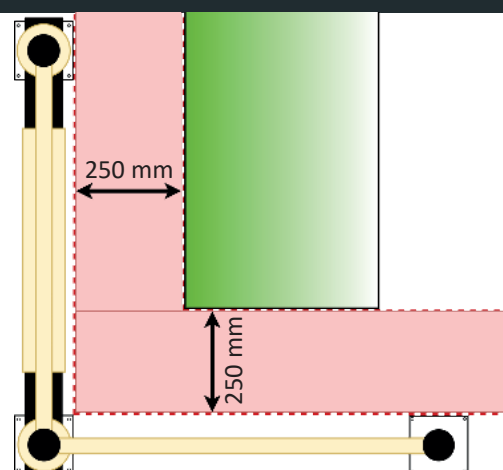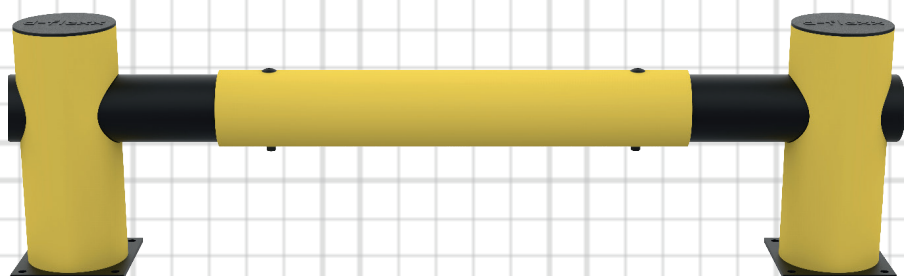

Article description	Middle post
Item number	DFVB-M
EAN	4250912311213
Customs tariff number	39269097




Height	516 mm
Width	225 mm
Length	1000 mm
Diameter	200 mm
Deflection zone	250 mm

Net weight	13,6 kg
Material	Polyethylene
Color	Yellow (like RAL 1023 traffic yellow) / black
Indoor use	Yes
Outdoor use	Yes
Boreholes	4


Fixing	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
---------------	---

Fixing dimensions	M12X85
--------------------------	--------

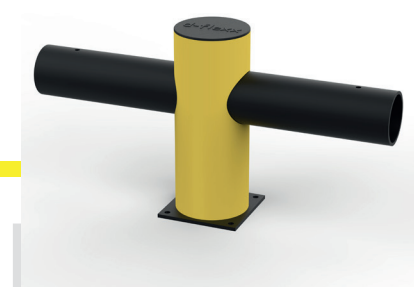

Material Properties

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°


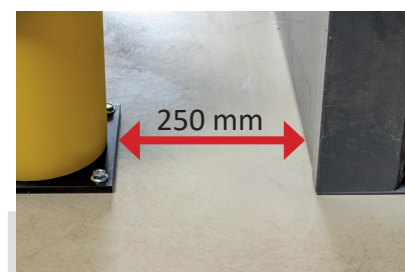


Environment

CO ₂ / m ³	20 kg
Recyclability	100%

Other

Standard Warranty	5 years
-------------------	---------

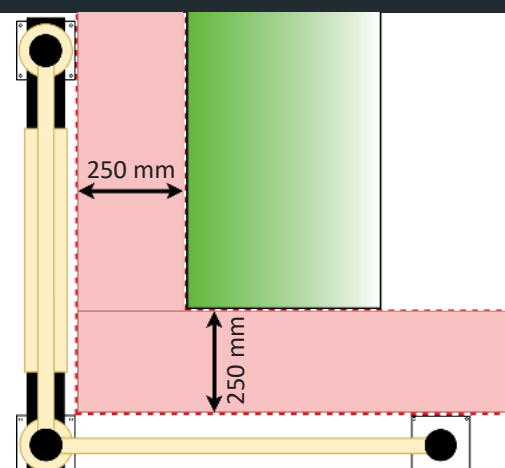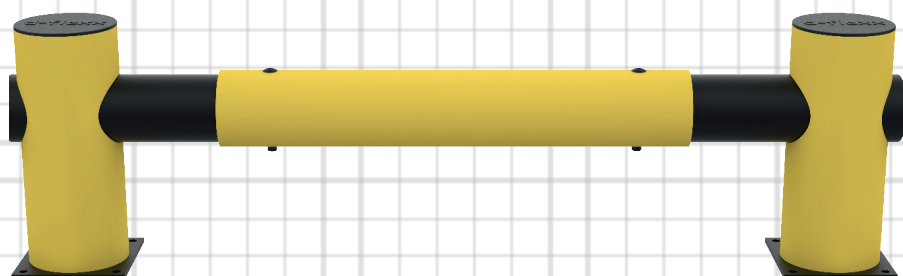


Article description	Standard pipe Ø 160 mm
Item number	DFVB-R
EAN	4250912311220
Customs tariff number	39269097



Height	
Width	
Length	930 mm
Diameter	160 mm
Deflection zone	See post

Net weight	2,66 kg
Material	Polyethylene
Color	Yellow (like RAL 1023 traffic yellow)
Indoor use	Yes
Outdoor use	Yes
Boreholes	
Fixing	

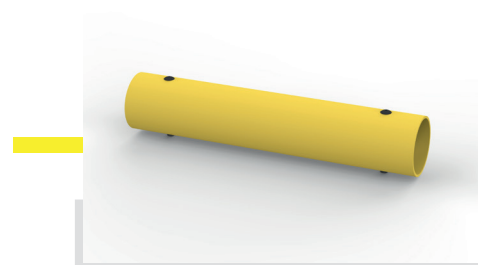

Material Properties




Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

Environment

CO ₂ / m ³	20 kg
Recyclability	100%

Other

Standard Warranty	5 years
-------------------	---------

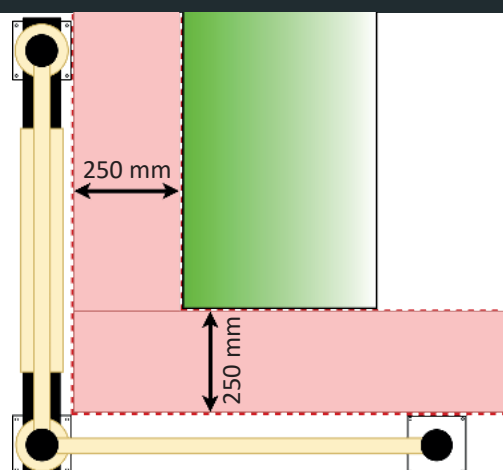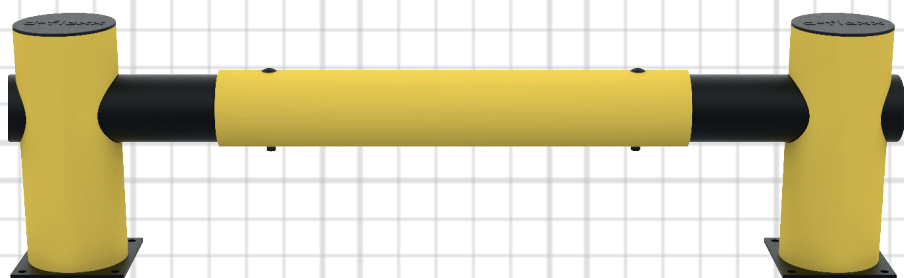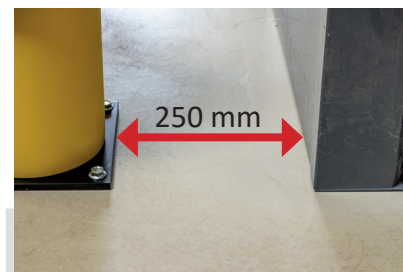


Article description	Individual Tube Ø 160 mm
Item number	DFVB-I
EAN	4250912311237
Customs tariff number	39269097



Height	
Width	
Length	Individual length 400- 929 mm
Diameter	160 mm
Deflection zone	See post

Net weight	2,88 kg
Material	Polyethylene
Color	Yellow (like RAL 1023 traffic yellow)
Indoor use	Yes
Outdoor use	Yes
Boreholes	
Fixing	

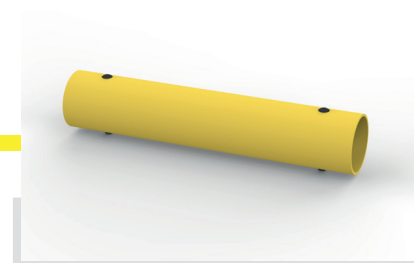

Material Properties

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

Environment

CO ₂ / m ³	20 kg
Recyclability	100%

Other

Standard Warranty	5 years
-------------------	---------

