

## Technical Information

Tested to withstand force of (Joule)	Top 2.500 J Bottom 10.000 J
Vehicle weight equivalent (kg)	5.000 kg
Vehicle equivalent speed (km/h)	7,2 km/h
Equivalent angle of impact	90°
Deflection zone	250 mm

## Material Properties



Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

## Environment

CO <sub>2</sub> / m <sup>3</sup>	18,5 kg
Recyclability	100%

## Other

Standard Warranty	5 years
-------------------	---------

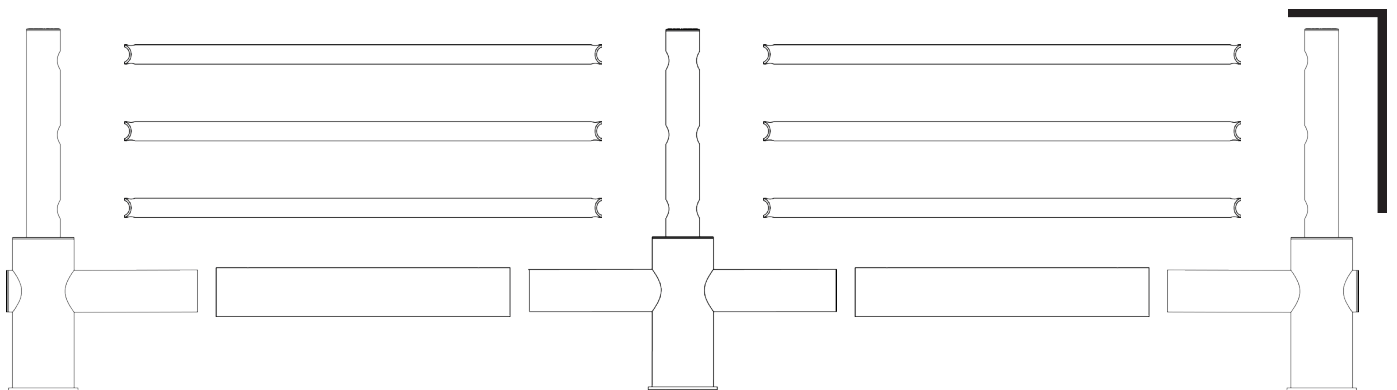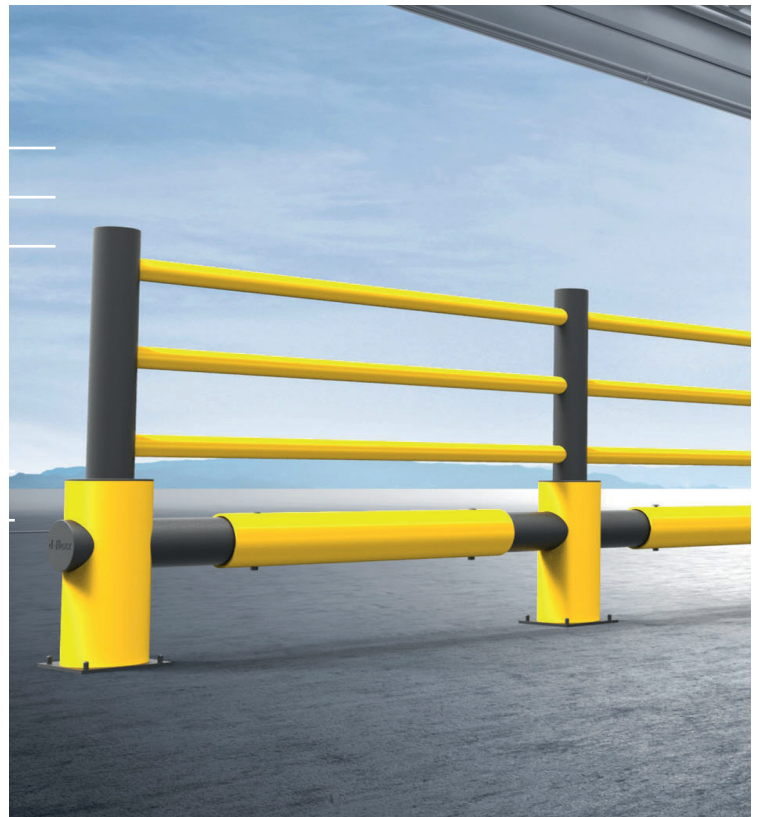

Art. No.	Description	Width	Weight
DFVB+E	End post	600 mm	17,0 kg
DFVB+M	Middle post	1000 mm	17,2 kg
DFVB+M+E	Echo to Delta middle post	600 mm	14,6 kg
DFVB+M+W90L	Echo to Delta corner post 90° left	600 mm	14,8 kg
DFVB+M+W90R	Echo to Delta corner post 90° right	600 mm	14,8 kg
DFVB+H1	Beam set: 3 beams length 1534 mm Ø 63 mm and 1 pipe length 930 mm Ø 160 mm		7,2 kg
DFVB+HI	Beam set: 3 beams individual length 1000 - 1533 mm Ø 63 mm and 1 pipe individual length		5,8 kg / m

<b>Article description</b>	Endpost
<b>Item number</b>	DFVB+E
<b>EAN</b>	4250912311244
<b>Customs tariff number</b>	39269097



<b>Height</b>	1200 mm
<b>Width</b>	225 mm
<b>Length</b>	650 mm
<b>Diameter</b>	200 mm / 110 mm
<b>Deflection zone</b>	250 mm

<b>Net weight</b>	17 kg
<b>Material</b>	Polyethylene
<b>Color</b>	Yellow (like RAL 1023 traffic yellow) / black
<b>Indoor use</b>	Yes
<b>Outdoor use</b>	Yes
<b>Boreholes</b>	4


<b>Fixing</b>	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
---------------	---

<b>Fixing dimensions</b>	M12X85
--------------------------	--------



### Material Properties

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°


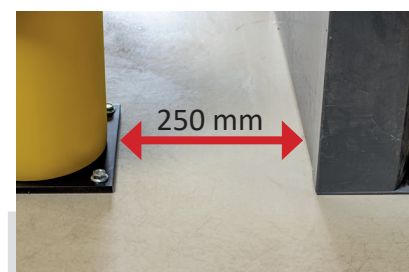


### Environment

CO <sub>2</sub> / m <sup>3</sup>	18,5 kg
Recyclability	100%

### Other

Standard Warranty	5 years
-------------------	---------

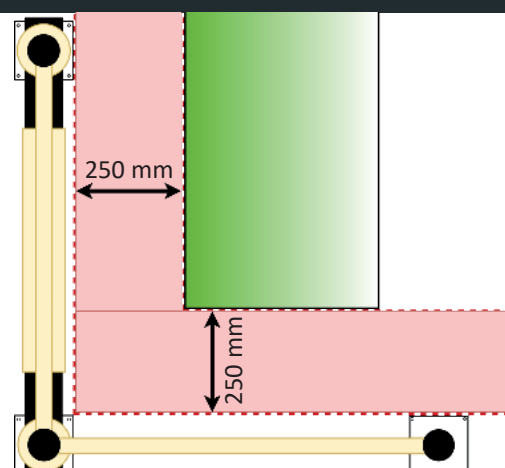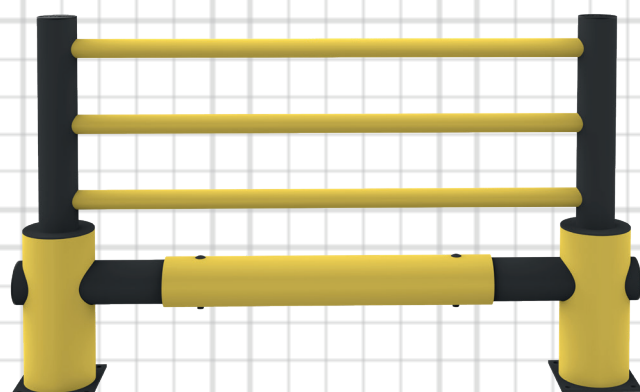

<b>Article description</b>	Middle post
<b>Item number</b>	DFVB+M
<b>EAN</b>	4250912311251
<b>Customs tariff number</b>	39269097



<b>Height</b>	1200 mm
<b>Width</b>	225 mm
<b>Length</b>	1000 mm
<b>Diameter</b>	200 mm / 110 mm
<b>Deflection zone</b>	250 mm

<b>Net weight</b>	17,2 kg
<b>Material</b>	Polyethylene
<b>Color</b>	Yellow (like RAL 1023 traffic yellow) / black
<b>Indoor use</b>	Yes
<b>Outdoor use</b>	Yes
<b>Boreholes</b>	4

<b>Fixing</b>	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
<b>Fixing dimensions</b>	M12X85



### Material Properties




Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

### Environment

CO <sub>2</sub> / m <sup>3</sup>	18,5 kg
Recyclability	100%

### Other

Standard Warranty	5 years
-------------------	---------

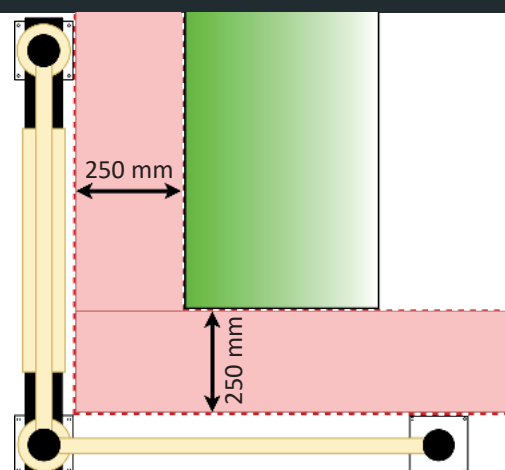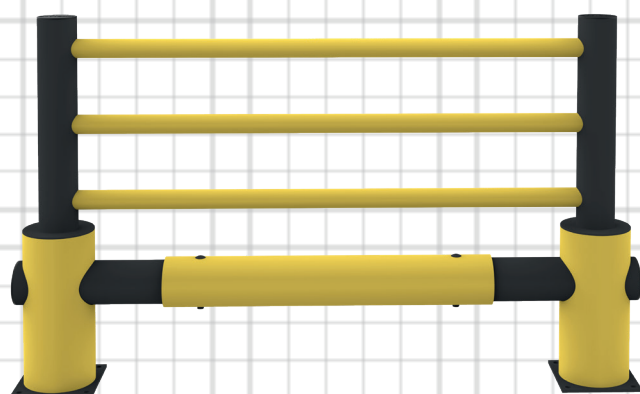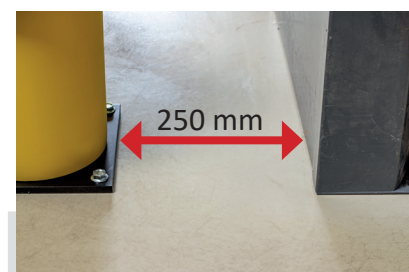

**Article description****Item number****EAN****Customs tariff number**

Echo to Delta corner post 90° left

DFVB+M+W90L

4250912395534

39269097

**Height****Width****Length****Diameter****Deflection zone**

1200 mm

225 mm

600 mm

200 mm / 110 mm

250 mm

**Net weight****Material****Color****Indoor use****Outdoor use****Boreholes****Fixing**

14,8 kg

Polyethylene

Yellow (like RAL 1023 traffic yellow) / black

Yes

Yes

4

The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.

**Fixing dimensions**

M12X85

**Material Properties**

Chemical Resistance

Temperature Range

high- ISO/TR 10358

-10° up to + 50°

**Environment**CO<sub>2</sub> / m<sup>3</sup>

18,5 kg




Recyclability

100%

**Other**

Standard Warranty

5 years

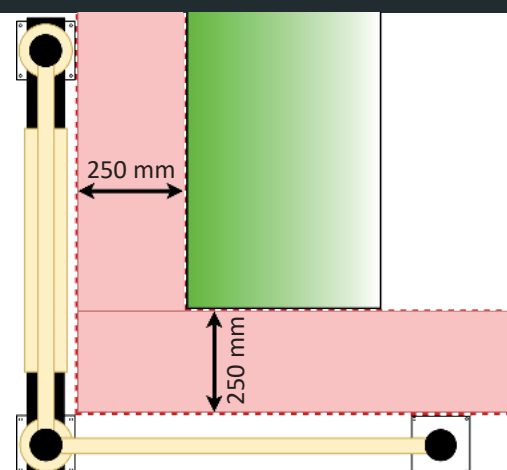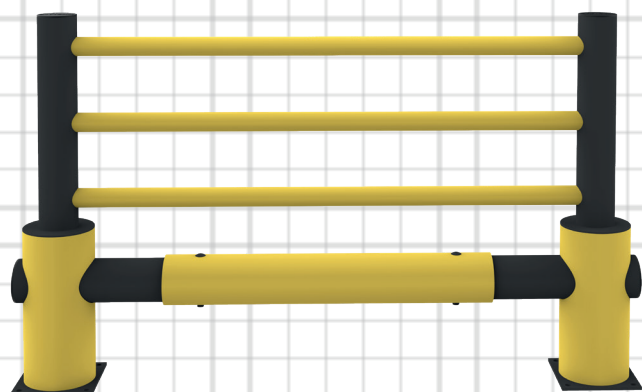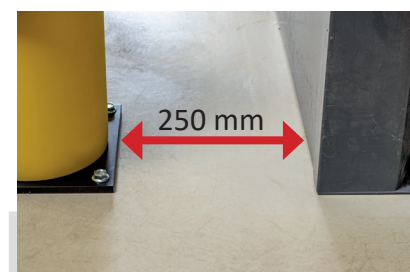

**Article description**

Echo to Delta corner post 90° right

**Item number**

DFVB+M+W90R

**EAN**

4250912395541

**Customs tariff number**

39269097

**Height**

1200 mm

**Width**

225 mm

**Length**

600 mm

**Diameter**

200 mm / 110 mm

**Deflection zone**

250 mm

**Net weight**

14,8 kg

**Material**

Polyethylene

**Color**

Yellow (like RAL 1023 traffic yellow) / black

**Indoor use**

Yes

**Outdoor use**

Yes

**Boreholes**

4

**Fixing**

The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.

**Fixing dimensions**

M12X85


**Material Properties**

Chemical Resistance

high- ISO/TR 10358

Temperature Range

-10° up to + 50°

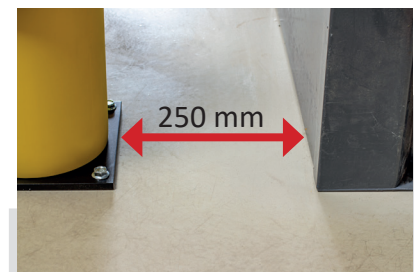**Environment**CO<sub>2</sub> / m<sup>3</sup>

18,5 kg



Recyclability

100%

**Other**

Standard Warranty

5 years

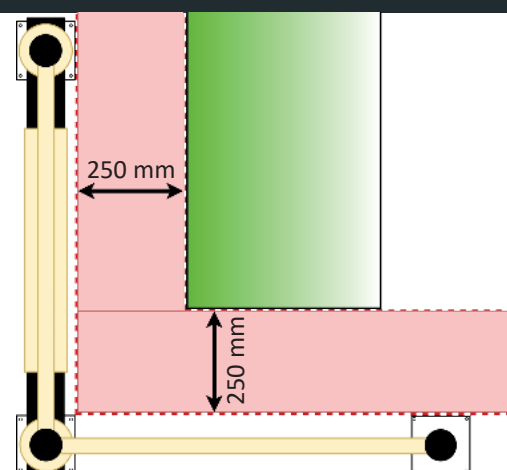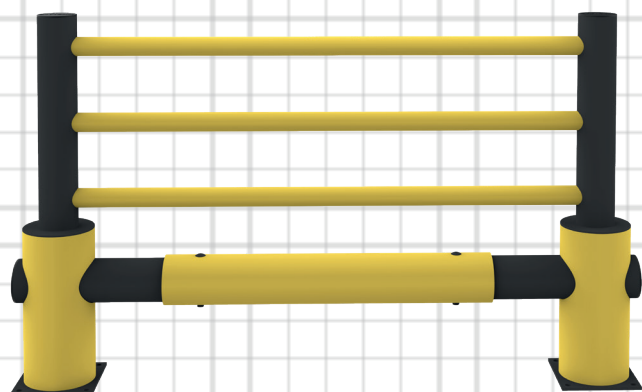

<b>Article description</b>	Beam set
<b>Item number</b>	DFVB+H1
<b>EAN</b>	4250912311268
<b>Customs tariff number</b>	39269097




<b>Height</b>	
<b>Width</b>	
<b>Length</b>	1534 mm
<b>Diameter</b>	160 mm
<b>Deflection zone</b>	See post

<b>Net weight</b>	7,2 kg / m
<b>Material</b>	Polyethylene
<b>Color</b>	Yellow (like RAL 1023 traffic yellow)
<b>Indoor use</b>	Yes
<b>Outdoor use</b>	Yes
<b>Boreholes</b>	
<b>Fixing</b>	



### Material Properties

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°


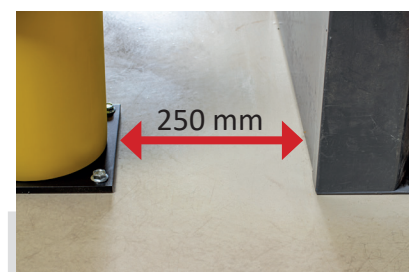


### Environment

CO <sub>2</sub> / m <sup>3</sup>	18,5 kg
Recyclability	100%

### Other

Standard Warranty	5 years
-------------------	---------

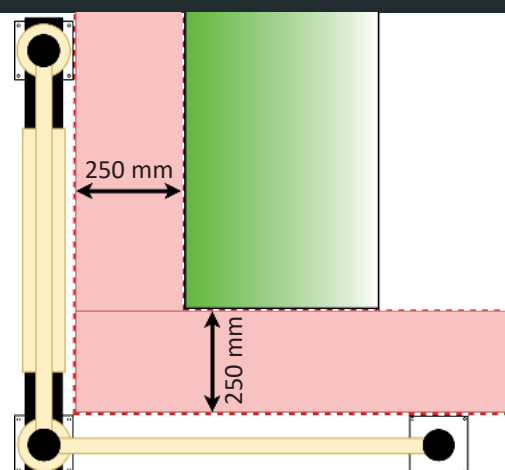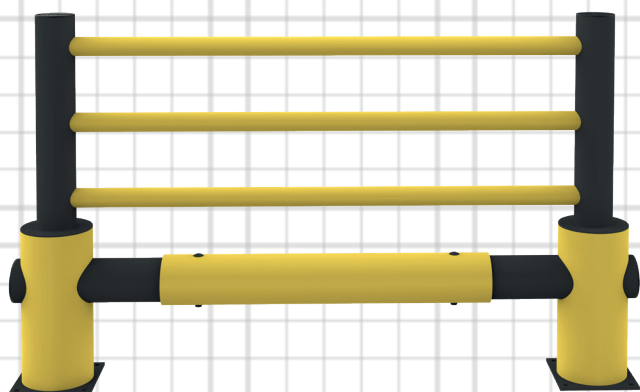




<b>Article description</b>	Beam set individual length
<b>Item number</b>	DFVB+HI
<b>EAN</b>	4250912311275
<b>Customs tariff number</b>	39269097
<b>Height</b>	
<b>Width</b>	
<b>Length</b>	individual length 1000- 1533 mm
<b>Diameter</b>	160 mm
<b>Deflection zone</b>	See post
<b>Net weight</b>	5,8 kg / m
<b>Material</b>	Polyethylene
<b>Color</b>	Yellow (like RAL 1023 traffic yellow)
<b>Indoor use</b>	Yes
<b>Outdoor use</b>	Yes
<b>Boreholes</b>	
<b>Fixing</b>	



### Material Properties

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

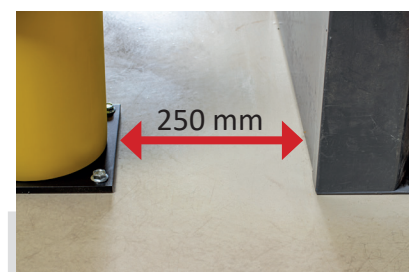

### Environment

CO <sub>2</sub> / m <sup>3</sup>	18,5 kg
Recyclability	100%

### Other

Standard Warranty	5 years
-------------------	---------

