

Technical Information

Tested to withstand force of (Joule)	2.500 J
Vehicle weight equivalent (kg)	2.000 kg
Vehicle equivalent speed (km/h)	5,7 km/h
Equivalent angle of impact	90°
Deflection zone	250 mm

Material Properties


Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

Environment

CO ₂ / m ³	18,5 kg
Recyclability	100%

Other

Standard Warranty	5 years
-------------------	---------

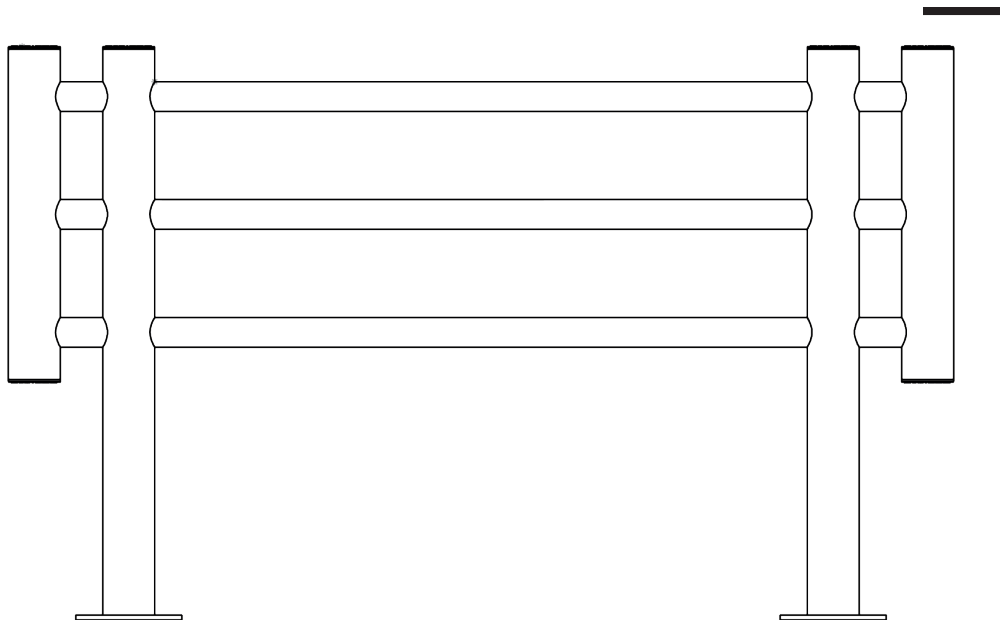

Art. No.	Description	Width	Weight
DFFS-FU1	Machine protective fencing	1000 mm	17,0 kg
DFFS-FU2	Machine protective fencing	1500 mm	19,0 kg
DFFS-FU3	Machine protective fencing	2000 mm	22,0 kg
The following item is not TÜV tested			
DFFS-SP	Slider plate 330 x 230 mm, material: steel		4,4 kg

Article description

Machine protection Fixed Unit 1 m

Item number

DFFS-FU1

EAN

4250912311282

Customs tariff number

39269097

**Height**

1200 mm

Width

225 mm

Length

1000 mm

Diameter

110 mm

Deflection zone

250 mm

Net weight

17 kg

Material

Polyethylene

Color

Yellow (like RAL 1023 traffic yellow) / black

Indoor use

Yes

Outdoor use

Yes

Boreholes

8

Fixing

The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.

Fixing dimensions

M10X70

**Material Properties**

Chemical Resistance

high- ISO/TR 10358

Temperature Range

-10° up to + 50°

**Environment**CO₂ / m³

18,5 kg



Recyclability

100%

Other

Standard Warranty

5 years

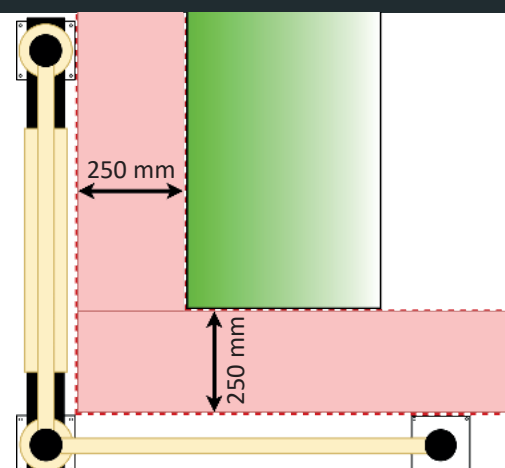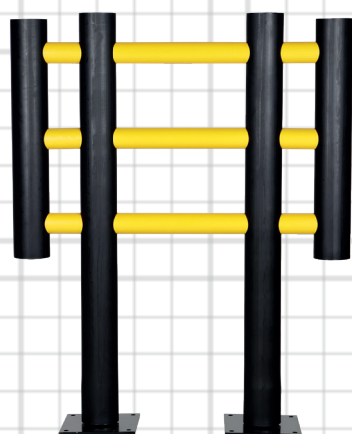

Article description	Machine protection Fixed Unit 1,5 m
Item number	DFFS-FU2
EAN	4250912311299
Customs tariff number	39269097



Height	1200 mm
Width	225 mm
Length	1500 mm
Diameter	110 mm
Deflection zone	250 mm

Net weight	19 kg
Material	Polyethylene
Color	Yellow (like RAL 1023 traffic yellow) / black
Indoor use	Yes
Outdoor use	Yes
Boreholes	8
Fixing	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
Fixing dimensions	M10X70



Material Properties

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°





Environment

CO ₂ / m ³	18,5 kg
Recyclability	100%

Other

Standard Warranty	5 years
-------------------	---------

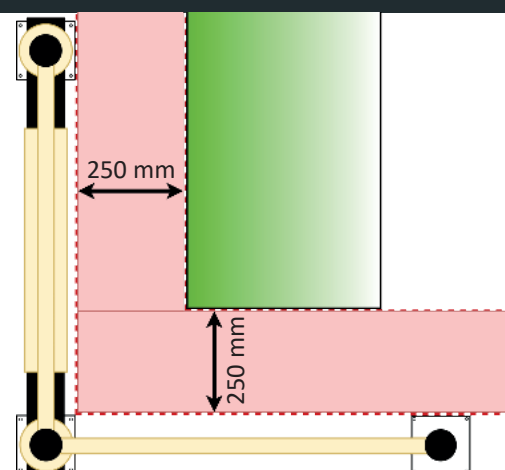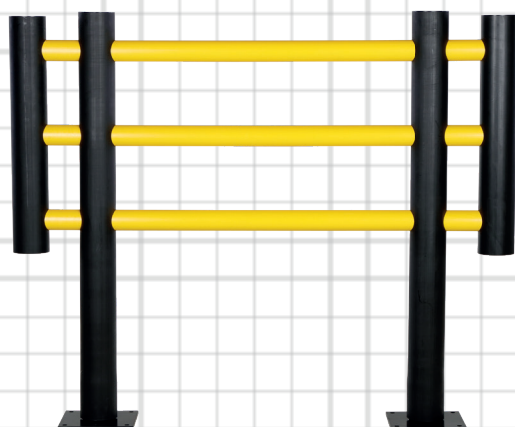

Article description

Machine protection Fixed Unit 2 m

Item number

DFFS-FU3

EAN

4250912311305

Customs tariff number

39269097

**Height**

1200 mm

Width

225 mm

Length

2000 mm

Diameter

110 mm

Deflection zone

250 mm

Net weight

22 kg

Material

Polyethylene

Color

Yellow (like RAL 1023 traffic yellow) / black

Indoor use

Yes

Outdoor use

Yes

Boreholes

8

Fixing

The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.

Fixing dimensions

M10X70

**Material Properties**

Chemical Resistance

high- ISO/TR 10358

Temperature Range

-10° up to + 50°

**Environment**CO₂ / m³

18,5 kg

Recyclability

100%

Other

Standard Warranty

5 years

