

Technical Information

Tested to withstand force of (Joule)	10.000 J
Vehicle weight equivalent (kg)	5.000 kg
Vehicle equivalent speed (km/h)	7,2 km/h
Equivalent angle of impact	90°
Deflection zone	250 mm

Material Properties



Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

Environment

CO ₂ / m ³	20 kg
Recyclability	100%

Other

Standard Warranty	5 years
-------------------	---------

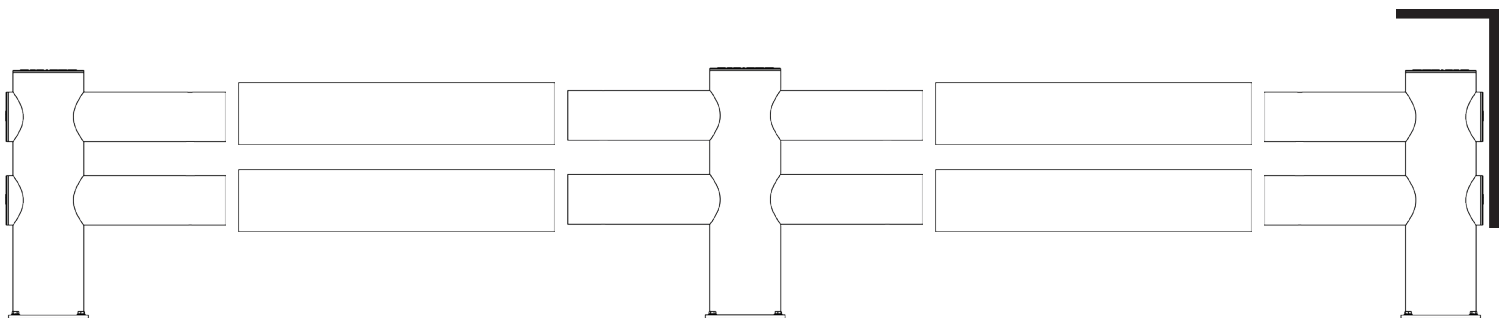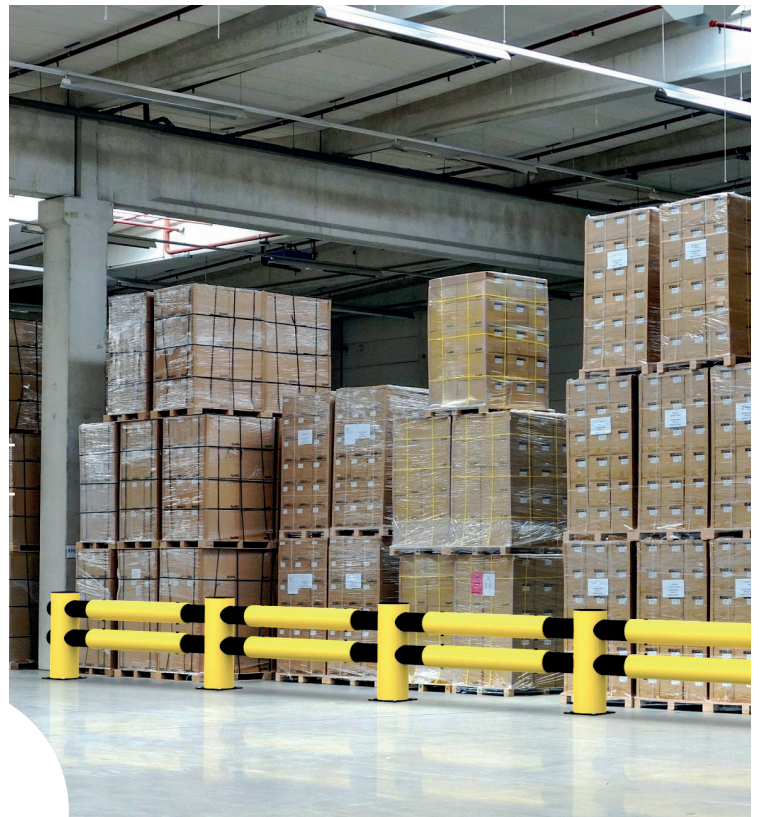

Art. No.	Description	Height	Weight
DFVBD-E	End post	706 mm	15,5 kg
DFVBD-M	Middle post	706 mm	15,9 kg
Art. No.	Description	Length	Weight
DFVBD-R	2 Standard pipes Ø 160 mm	2 x 930 mm	5,2 kg
DFVBD-I	2 Standard pipes Ø 160 mm	Individual length 2 x 400 - 929 mm	5,2 kg / m

Article description	Endpost
Item number	DFVBD-E
EAN	4250912311541
Customs tariff number	39269097



Height	706 mm
Width	225 mm
Length	650 mm
Diameter	
Deflection zone	250 mm

Net weight	14,5 kg
Material	Polyethylene
Color	Yellow (like RAL 1023 traffic yellow) / black
Indoor use	Yes
Outdoor use	Yes
Boreholes	4


Fixing	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
---------------	---

Fixing dimensions	M12X85
--------------------------	--------



Material Properties

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°


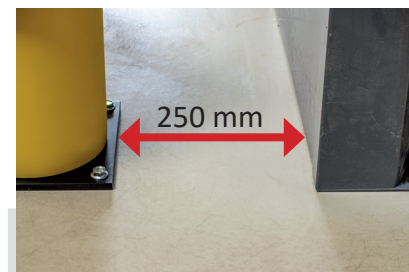


Environment

CO ₂ / m ³	20 kg
Recyclability	100%

Other

Standard Warranty	5 years
-------------------	---------

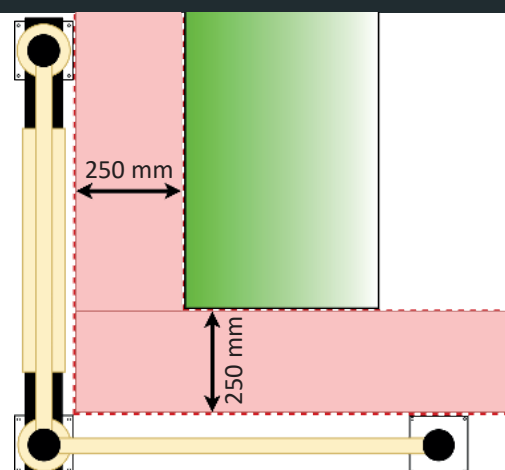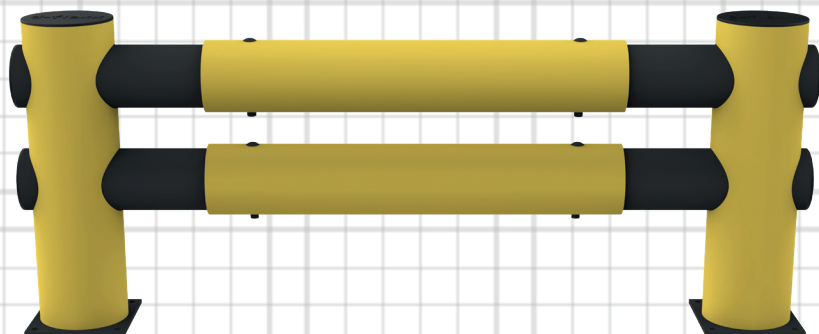

Article description	Endpost
Item number	DFVBD-M
EAN	4250912311558
Customs tariff number	39269097



Height	706 mm
Width	225 mm
Length	1000 mm
Diameter	
Deflection zone	250 mm

Net weight	15,9 kg
Material	Polyethylene
Color	Yellow (like RAL 1023 traffic yellow) / black
Indoor use	Yes
Outdoor use	Yes
Boreholes	4


Fixing	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
---------------	---

Fixing dimensions	M12X85
--------------------------	--------



Material Properties

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°


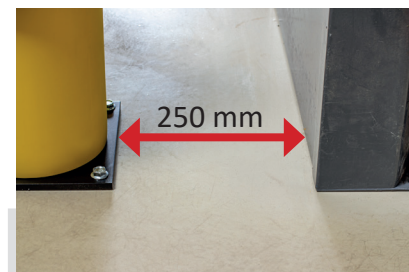


Environment

CO ₂ / m ³	20 kg
Recyclability	100%

Other

Standard Warranty	5 years
-------------------	---------

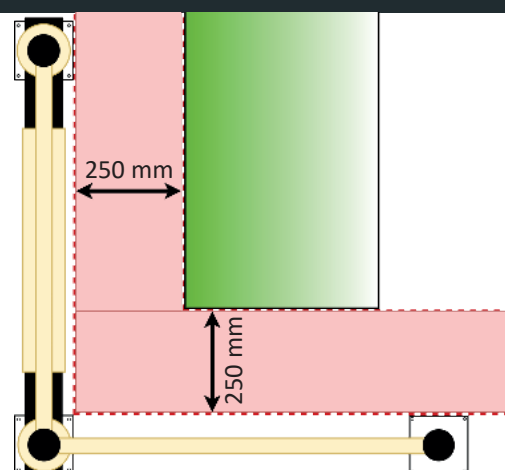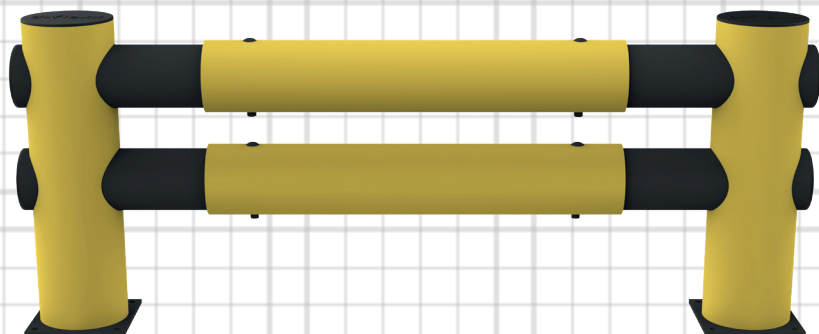

Article description	Standard pipe Ø 160 mm
Item number	DFVBD-R
EAN	4250912311565
Customs tariff number	39269097




Height	
Width	
Length	930 mm
Diameter	160 mm
Deflection zone	See post

Net weight	5,2 kg
Material	Polyethylene
Color	Yellow (like RAL 1023 traffic yellow)
Indoor use	Yes
Outdoor use	Yes
Boreholes	
Fixing	



Material Properties

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°


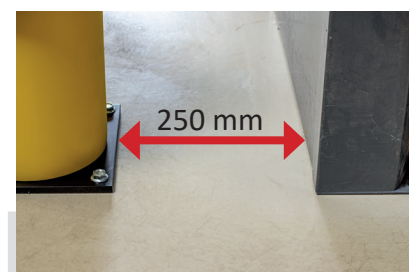


Environment

CO ₂ / m ³	20 kg
Recyclability	100%

Other

Standard Warranty	5 years
-------------------	---------

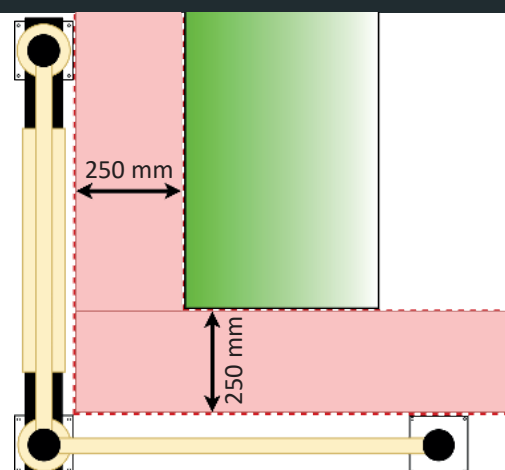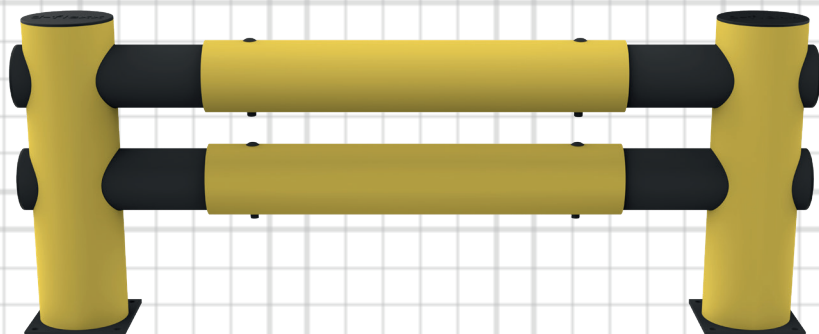

Article description	Standard pipe individual length Ø 160 mm
Item number	DFVBD-I
EAN	4250912311572
Customs tariff number	39269097




Height	
Width	
Length	individual length 930- 4050 mm
Diameter	160 mm
Deflection zone	See post

Net weight	5,2 kg
Material	Polyethylene
Color	Yellow (like RAL 1023 traffic yellow)
Indoor use	Yes
Outdoor use	Yes
Boreholes	
Fixing	



Material Properties

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

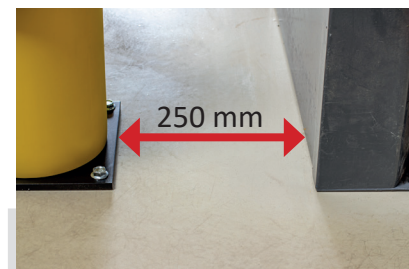

Environment

CO ₂ / m ³	20 kg
Recyclability	100%

Other

Standard Warranty	5 years
-------------------	---------

