

Material Properties




Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°
Deflection zone	250 mm

Environment

CO ₂ / m ³	20 kg
Recyclability	100%

Other

Standard Warranty	5 years
-------------------	---------

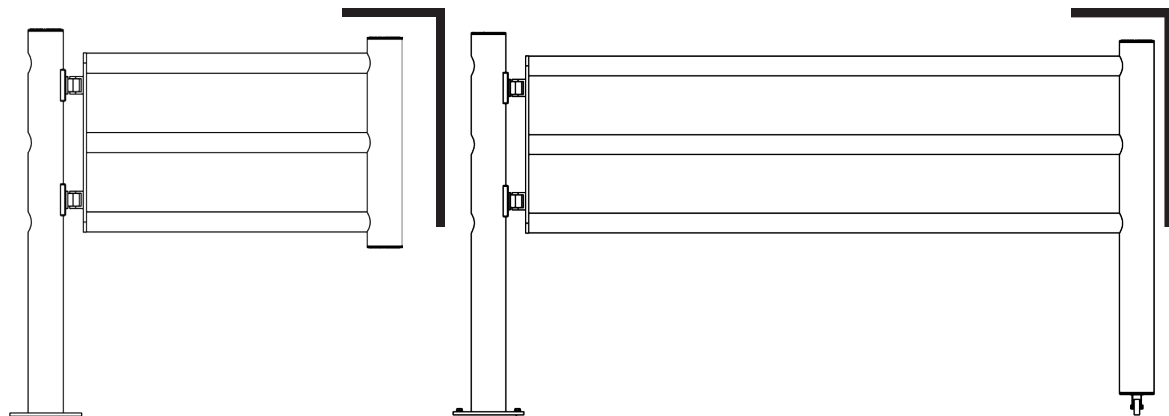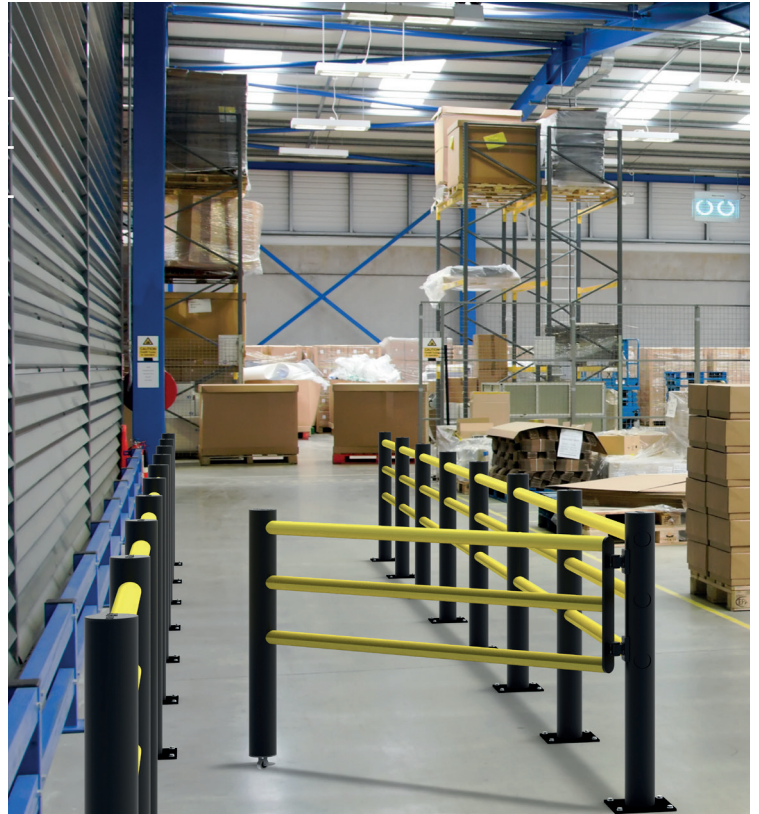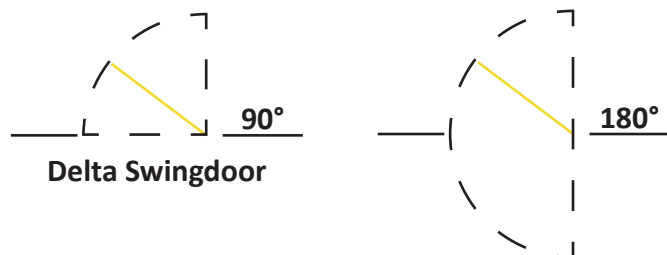

Art. No.	Description	Weight
DFJU-TM	Middle post for Juliet swing door in the „Delta“ system	9,0 kg
DFJU-TT	T-post 90° for Juliet swing door in the „Delta“ system	8,9 kg
DFJU-TW90L	Corner post 90° left for Juliet swing door in the „Delta“ system	8,9 kg
DFJU-TW90R	Corner post 90° right for Juliet swing door in the „Delta“ system	8,9 kg
DFJU-TE	End post „Delta“ for Juliet swing door in the „Delta“ system	8,7 kg

Article description

Middle post for Juliet swing door in the „Delta“ system

Item number

DFJU-TM

EAN

4250912395282

Customs tariff number

39269097

**Height**

1200 mm

Width

225 mm

Length

225 mm

Diameter

110 mm

Deflection zone

250 mm

Net weight

9,0 kg

Material

Polyethylene

Color

Black

Indoor use

Yes

Outdoor use

Yes

Boreholes

4

Fixing

The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.

Fixing dimensions

M10X70

Material Properties

Chemical Resistance

high- ISO/TR 10358

Temperature Range


-10° up to + 50°

EnvironmentCO₂ / m³ 20 kg

Recyclability 100%

Other

Standard Warranty 5 years

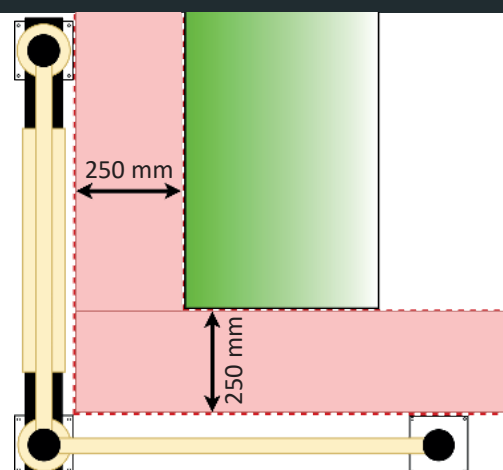

Article description T-post 90° for Juliet swing door in the „Delta“ system

Item number DFJU-TT

EAN 4250912395299

Customs tariff number 39269097



Height 1200 mm

Width 225 mm

Length 225 mm

Diameter 110 mm

Deflection zone 250 mm

Net weight 8,9 kg

Material Polyethylene

Color Black


Indoor use Yes

Outdoor use Yes

Boreholes 4

Fixing The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.

Fixing dimensions M10X70

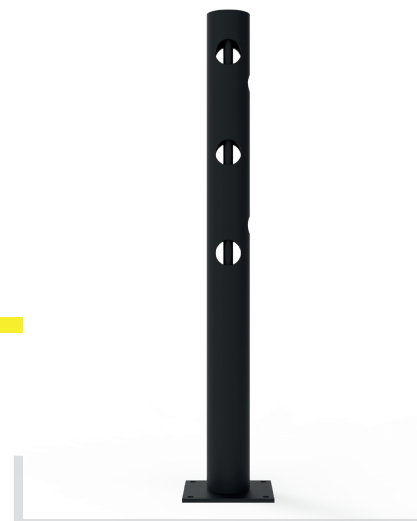

Material Properties

Chemical Resistance high- ISO/TR 10358

Temperature Range -10° up to + 50°


Environment

CO₂ / m³ 20 kg

Recyclability 100%

Other

Standard Warranty 5 years

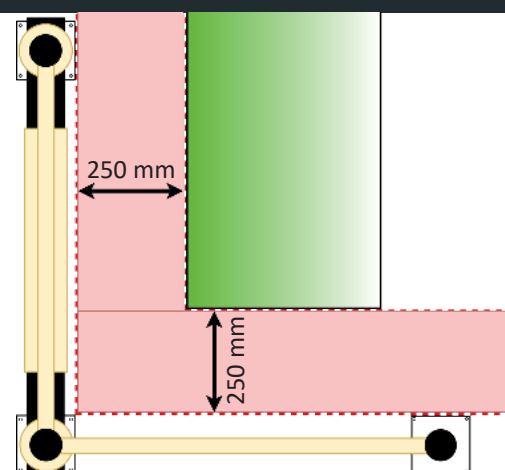

Article description**Item number****EAN****Customs tariff number**

Corner post 90° left for Juliet swing door in the „Delta“ system

DFJU-TW90L

4250912395305

39269097

**Height**

1200 mm

Width

225 mm

Length

225 mm

Diameter

110 mm

Deflection zone

250 mm

Net weight

8,9 kg

Material

Polyethylene

Color

Black

Indoor use

Yes

Outdoor use

Yes

Boreholes

4

Fixing

The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.

Fixing dimensions

M10X70

Material Properties

Chemical Resistance

high- ISO/TR 10358

Temperature Range


-10° up to + 50°

EnvironmentCO₂ / m³ 20 kg

Recyclability 100%

Other

Standard Warranty 5 years

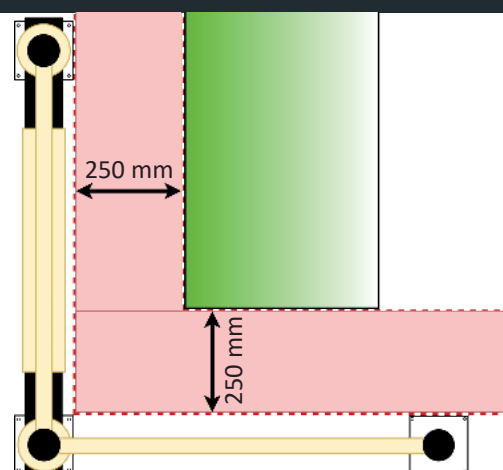

Article description**Item number****EAN****Customs tariff number**

Corner post 90° right for Juliet swing door in the „Delta“ system

DFJU-TW90R

4250912395312

39269097

**Height**

1200 mm

Width

225 mm

Length

225 mm

Diameter

110 mm

Deflection zone

250 mm

Net weight

8,9 kg

Material

Polyethylene

Color

Black

Indoor use

Yes

Outdoor use

Yes

Boreholes

4

Fixing

The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.

Fixing dimensions

M10X70

Material Properties

Chemical Resistance

high- ISO/TR 10358

Temperature Range


-10° up to + 50°

EnvironmentCO₂ / m³ 20 kg

Recyclability 100%

Other

Standard Warranty 5 years

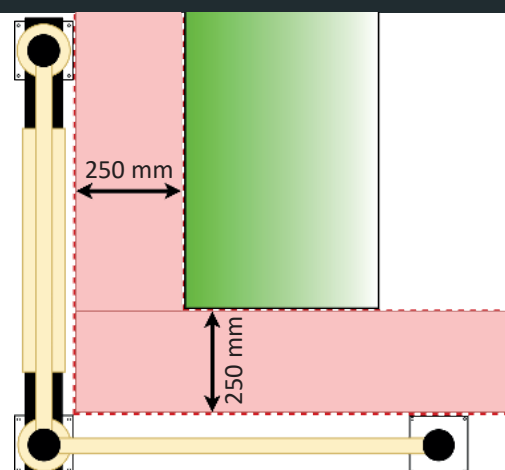

Article description**Item number****EAN****Customs tariff number**

End post „Delta“ for Juliet swing door in the „Delta“ system

DFJU-TE

4250912395077

39269097

**Height****Width****Length****Diameter****Deflection zone**

1200 mm

225 mm

225 mm

110 mm

250 mm

Net weight**Material****Color****Indoor use****Outdoor use****Boreholes****Fixing**

8,7 kg

Polyethylene

Black

Yes

Yes

4

The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.

Fixing dimensions

M10X70

Material Properties

Chemical Resistance

Temperature Range

high- ISO/TR 10358

-10° up to + 50°

EnvironmentCO₂ / m³

20 kg

Recyclability

100%

Other

Standard Warranty

5 years

