

## Technical Information

Tested to withstand force of (Joule)	Top 2.500 J Bottom 10.000 J
Vehicle weight equivalent (kg)	5.000 kg
Vehicle equivalent speed (km/h)	7,2 km/h
Equivalent angle of impact	90°
Deflection zone	250 mm

## Material Properties



Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

## Environment

CO <sub>2</sub> / m <sup>3</sup>	18,5 kg
Recyclability	100%

## Other

Standard Warranty	5 years
-------------------	---------

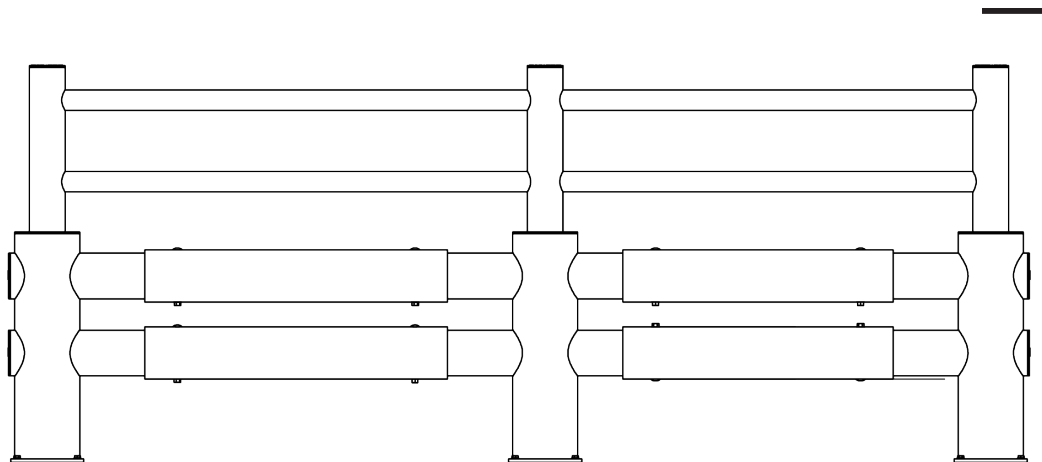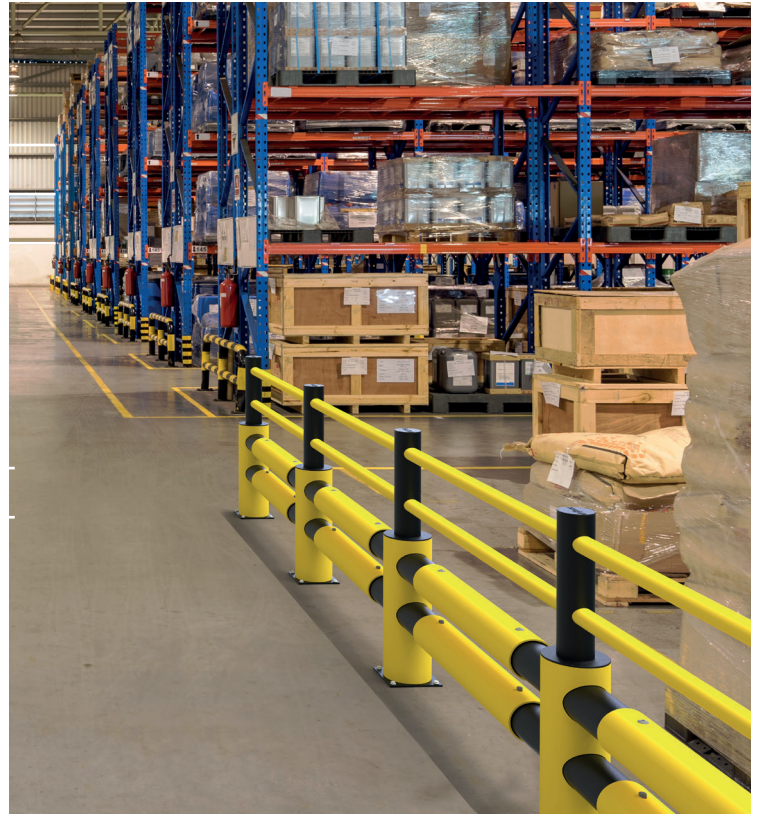

Art. No.	Description	Width	Weight
DFDH-M-E	End post	600 mm	19,2 kg
DFDH-M-M	Middle post	1000 mm	20,9 kg
DFDH-M-H1	Beam set: 2 beams length 1510 mm Ø 63 mm and 2 pipes length 930 mm Ø 160 mm		9,3 kg
DFDH-M-HI	Beam set: 2 beams individual length 980 - 1510 mm Ø 63 mm and 2 pipes individual length		9,5 kg / m

<b>Article description</b>	Endpost
<b>Item number</b>	DFDH-M-E
<b>EAN</b>	4250912395220
<b>Customs tariff number</b>	39269097




<b>Height</b>	1216 mm
<b>Width</b>	225 mm
<b>Length</b>	650 mm
<b>Diameter</b>	
<b>Deflection zone</b>	250 mm

<b>Net weight</b>	19,2 kg
<b>Material</b>	Polyethylene
<b>Color</b>	Yellow (like RAL 1023 traffic yellow) / black
<b>Indoor use</b>	Yes
<b>Outdoor use</b>	Yes
<b>Boreholes</b>	4
<b>Fixing</b>	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
<b>Fixing dimensions</b>	M12X85



### Material Properties

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°


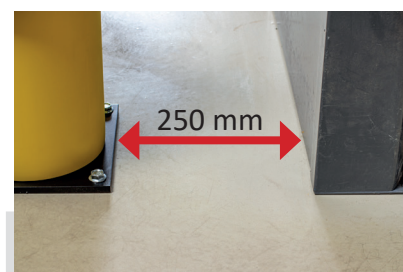


### Environment

CO <sub>2</sub> / m <sup>3</sup>	18,5 kg
Recyclability	100%

### Other

Standard Warranty	5 years
-------------------	---------

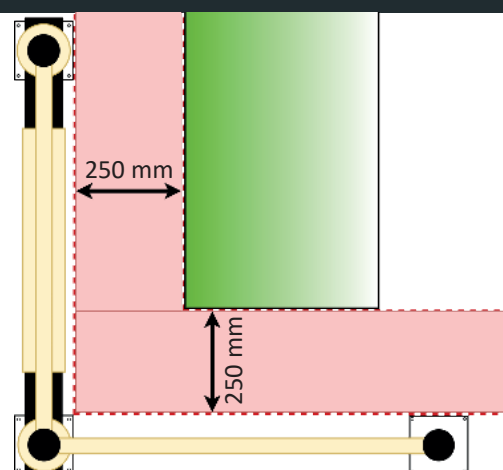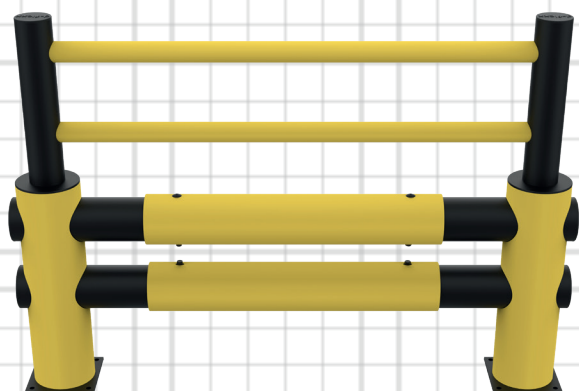

<b>Article description</b>	Middle post
<b>Item number</b>	DFDH-M-M
<b>EAN</b>	4250912395237
<b>Customs tariff number</b>	39269097




<b>Height</b>	1216 mm
<b>Width</b>	225 mm
<b>Length</b>	1000 mm
<b>Diameter</b>	
<b>Deflection zone</b>	250 mm

<b>Net weight</b>	20,9 kg
<b>Material</b>	Polyethylene
<b>Color</b>	Yellow (like RAL 1023 traffic yellow) / black
<b>Indoor use</b>	Yes
<b>Outdoor use</b>	Yes
<b>Boreholes</b>	4
<b>Fixing</b>	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
<b>Fixing dimensions</b>	M12X85



### Material Properties

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°


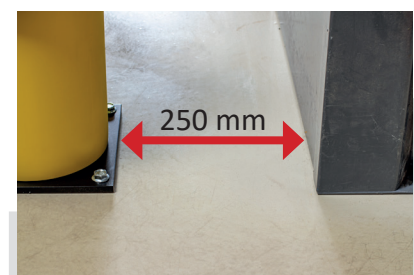


### Environment

CO <sub>2</sub> / m <sup>3</sup>	18,5 kg
Recyclability	100%

### Other

Standard Warranty	5 years
-------------------	---------

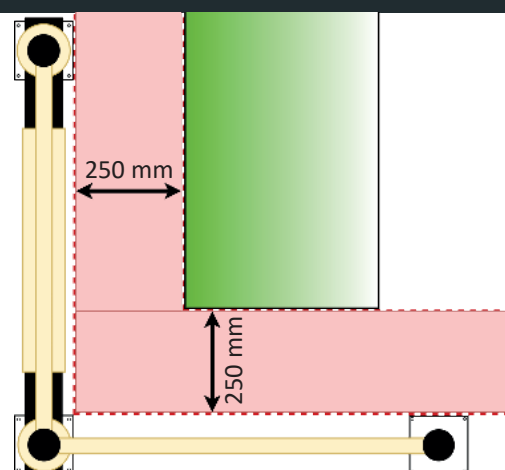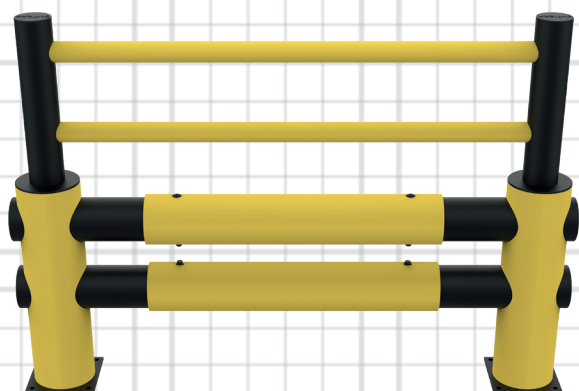


**Article description** Beam set  
**Item number** DFDH-M-H1  
**EAN** 4250912395251  
**Customs tariff number** 39269097




**Height**  
**Width**  
**Length** 1510 mm  
**Diameter** Ø 63 mm  
**Deflection zone** See post

**Net weight** 9,3 kg  
**Material** Polyethylene  
**Color** Yellow (like RAL 1023 traffic yellow)  
**Indoor use** Yes  
**Outdoor use** Yes  
**Boreholes**  
**Fixing**

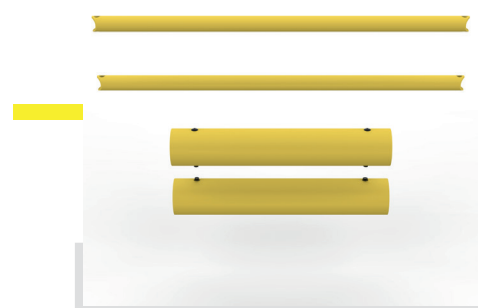

### Material Properties

**Chemical Resistance** high- ISO/TR 10358  
**Temperature Range** -10° up to + 50°


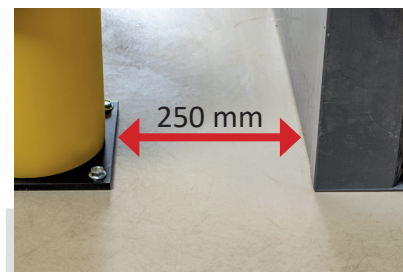


### Environment

**CO<sub>2</sub> / m<sup>3</sup>** 18,5 kg  
**Recyclability** 100%

### Other

**Standard Warranty** 5 years

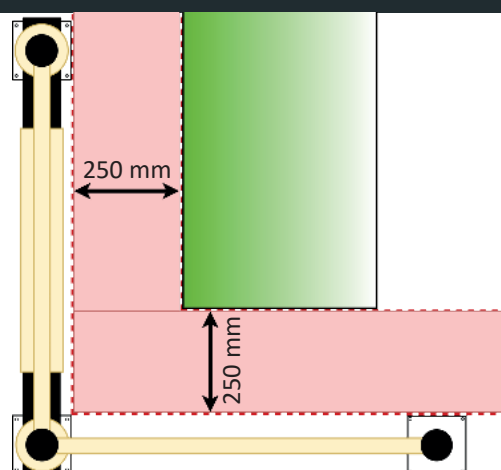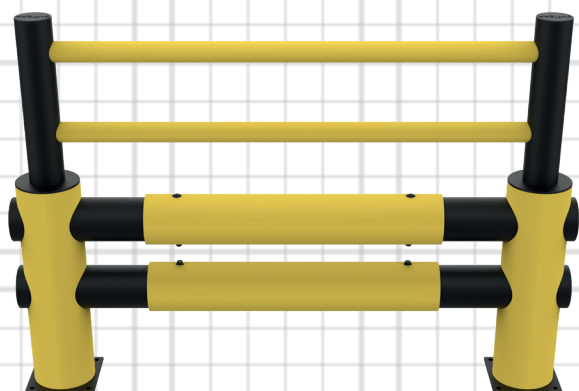


<b>Article description</b>	Beam set individual length
<b>Item number</b>	DFDH-M-HI
<b>EAN</b>	4250912395244
<b>Customs tariff number</b>	39269097




<b>Height</b>	
<b>Width</b>	
<b>Length</b>	Individual length 980- 1510 mm
<b>Diameter</b>	Ø 63 mm
<b>Deflection zone</b>	See post

<b>Net weight</b>	9,3 kg
<b>Material</b>	Polyethylene
<b>Color</b>	Yellow (like RAL 1023 traffic yellow)
<b>Indoor use</b>	Yes
<b>Outdoor use</b>	Yes
<b>Boreholes</b>	
<b>Fixing</b>	

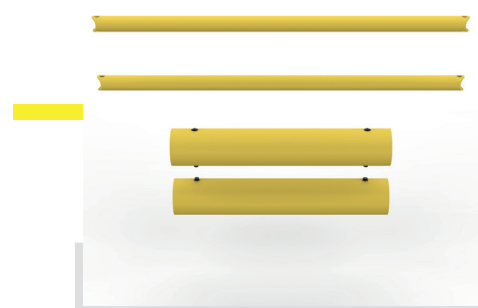

### Material Properties

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

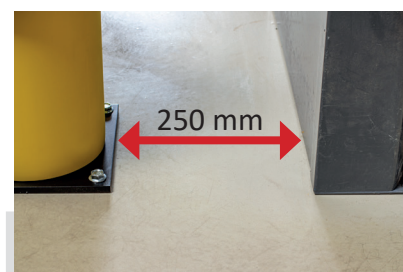

### Environment

CO <sub>2</sub> / m <sup>3</sup>	18,5 kg
Recyclability	100%

### Other

Standard Warranty	5 years
-------------------	---------

