

Technical Information

Deflection zone100 mm

Material Properties


Chemical Resistancehigh- ISO/TR 10358
Temperature Range-10° up to + 50°

Environment

Recyclability100%

Other

Standard Warranty5 years

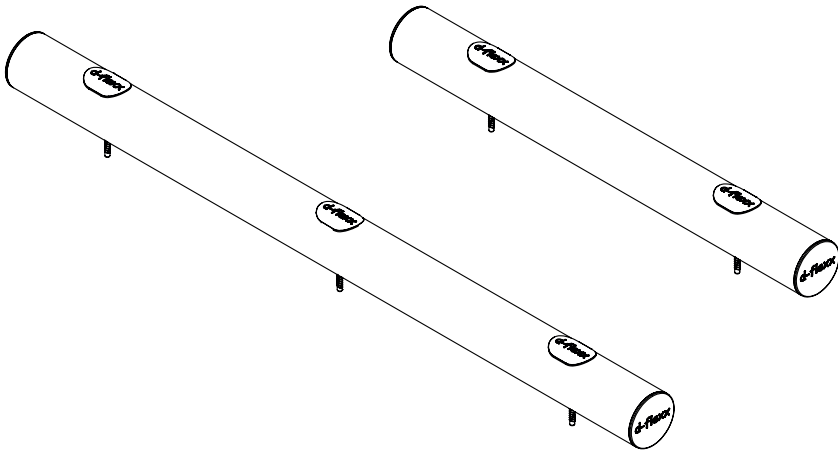

Art. No.	Description	Weight
DFKB-1	Kerb Barrier 1300 mm	5,9 kg
DFKB-2	Kerb Barrier 2000 mm	8,5 kg
DFKB-3	Kerb Barrier 1500 mm	6,8 kg
DFKB-4	Kerb Barrier 1000 mm	4,9 kg
DFKB-I	Kerb Barrier individual 400 - 1499 mm	
DFKB-I2	Kerb Barrier individual 1500 - 2000 mm	
DFKB-5	Kerb Barrier 500 mm	3,2 kg

Article description	Kerb Barrier 1300 mm
Item number	DFKB-1
EAN	4250912395619
Customs tariff number	39269097



Height	140 mm
Width	140 mm
Length	1300 mm
Diameter	140 mm
Deflection zone	100 mm

Net weight	5,9 kg
Material	Polyethylene
Color	Yellow (like RAL 1023 traffic yellow) / black
Indoor use	Yes
Outdoor use	Yes
Boreholes	2


Fixing	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
---------------	---

Fixing dimensions	M12X85
--------------------------	--------



Material Properties

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

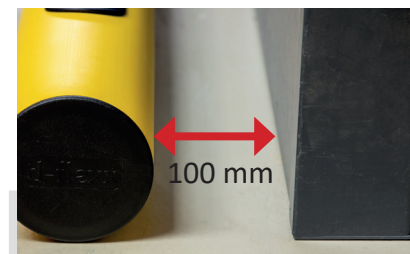


Environment

Recyclability	100%
---------------	------

Other

Standard Warranty	5 years
-------------------	---------

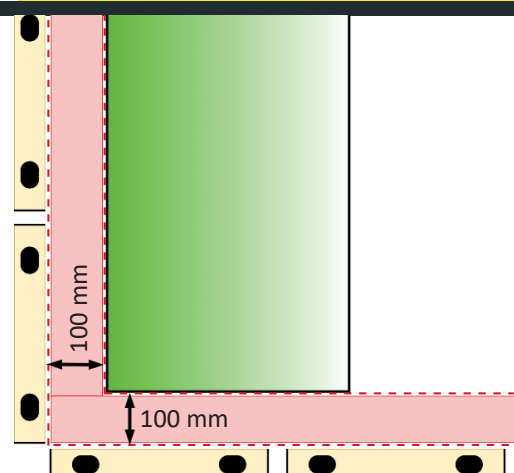

Article description Kerb Barrier 2000 mm
Item number DFKB-2
EAN 4250912395626
Customs tariff number 39269097



Height 140 mm
Width 140 mm
Length 2000 mm
Diameter 140 mm
Deflection zone 100 mm

Net weight 8,5 kg
Material Polyethylene
Color Yellow (like RAL 1023 traffic yellow) / black
Indoor use Yes
Outdoor use Yes
Boreholes 3

Fixing The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.

Fixing dimensions M12X85



Material Properties



Chemical Resistance high- ISO/TR 10358
Temperature Range -10° up to + 50°

Environment

Recyclability 100%

Other

Standard Warranty 5 years

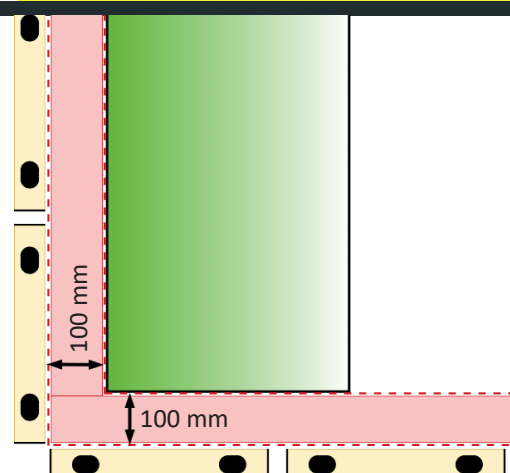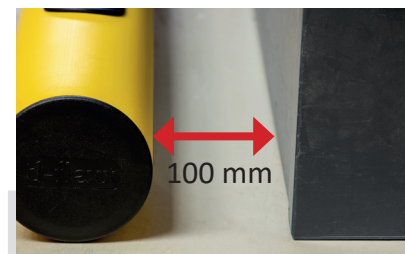

Article description	Kerb Barrier 1500 mm
Item number	DFKB-3
EAN	4250912395657
Customs tariff number	39269097



Height	140 mm
Width	140 mm
Length	1500 mm
Diameter	140 mm
Deflection zone	100 mm

Net weight	6,8 kg
Material	Polyethylene
Color	Yellow (like RAL 1023 traffic yellow) / black
Indoor use	Yes
Outdoor use	Yes
Boreholes	3

Fixing	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
---------------	---

Fixing dimensions	M12X85
--------------------------	--------



Material Properties



Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

Environment

Recyclability	100%
---------------	------

Other

Standard Warranty	5 years
-------------------	---------

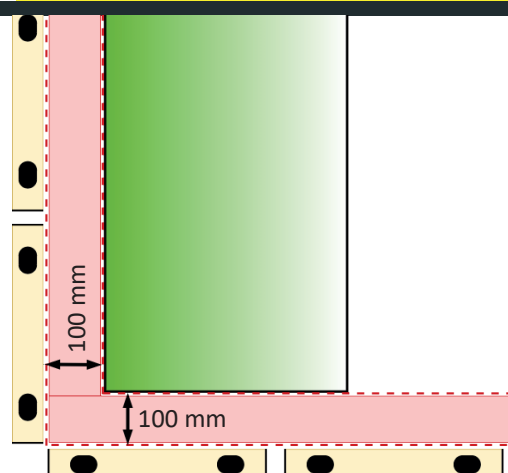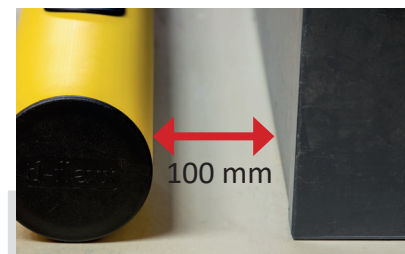

Article description Kerb Barrier 1000 mm
Item number DFKB-4
EAN 4250912395664
Customs tariff number 39269097



Height 140 mm
Width 140 mm
Length 1000 mm
Diameter 140 mm
Deflection zone 100 mm

Net weight 4,9 kg
Material Polyethylene
Color Yellow (like RAL 1023 traffic yellow) / black
Indoor use Yes
Outdoor use Yes
Boreholes 2

Fixing The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.

Fixing dimensions M12X85



Material Properties




Chemical Resistance high- ISO/TR 10358
Temperature Range -10° up to + 50°

Environment

Recyclability 100%

Other

Standard Warranty 5 years

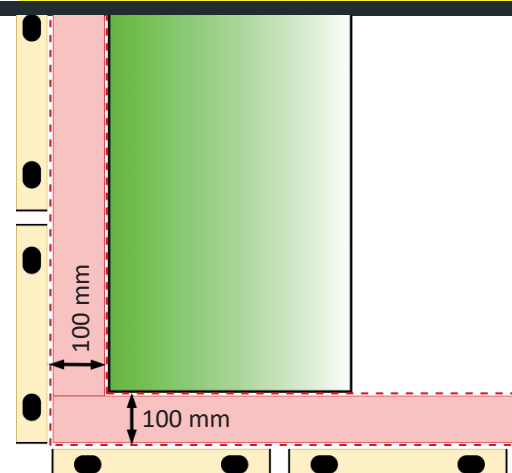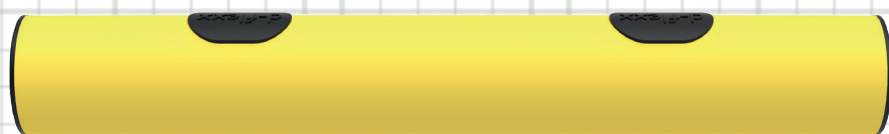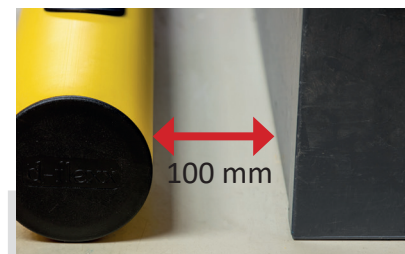

Article description	Kerb Barrier individual lenght 400- 1499 mm
Item number	DFKB-I
EAN	4250912395633
Customs tariff number	39269097



Height	140 mm
Width	140 mm
Length	400- 1499 mm
Diameter	140 mm
Deflection zone	100 mm

Net weight

Material	Polyethylene
Color	Yellow (like RAL 1023 traffic yellow) / black

Indoor use	Yes
-------------------	-----

Outdoor use	Yes
--------------------	-----

Boreholes	2
------------------	---

Fixing	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
---------------	---

Fixing dimensions	M12X85
--------------------------	--------



Material Properties



Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

Environment

Recyclability	100%
---------------	------

Other

Standard Warranty	5 years
-------------------	---------

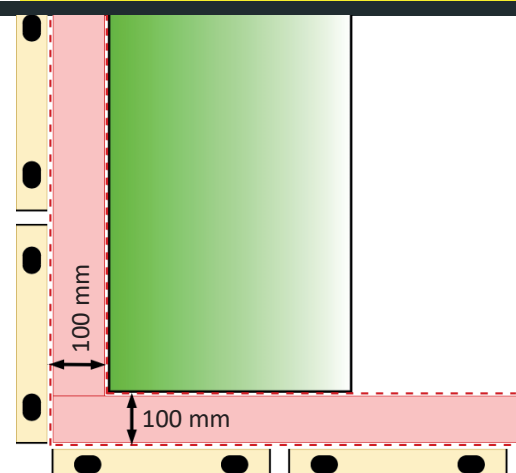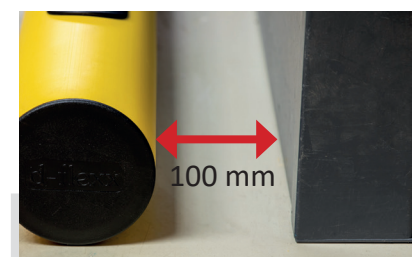

Article description	Kerb Barrier individual length 1500- 2000 mm
Item number	DFKB-I2
EAN	4250912395640
Customs tariff number	39269097



Height	140 mm
Width	140 mm
Length	1500- 2000 mm
Diameter	140 mm
Deflection zone	100 mm

Net weight

Material	Polyethylene
Color	Yellow (like RAL 1023 traffic yellow) / black


Indoor use	Yes
-------------------	-----

Outdoor use	Yes
--------------------	-----

Boreholes	3
------------------	---

Fixing	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
---------------	---

Fixing dimensions	M12X85
--------------------------	--------

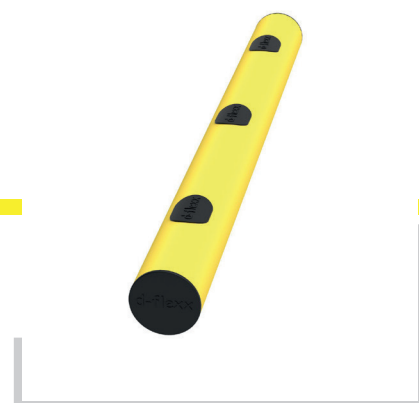

Material Properties



Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

Environment

Recyclability	100%
---------------	------

Other

Standard Warranty	5 years
-------------------	---------

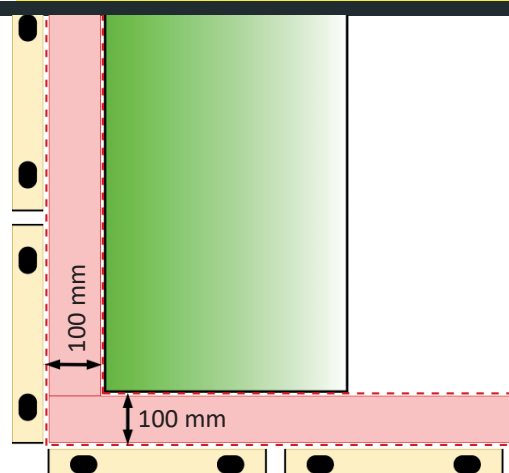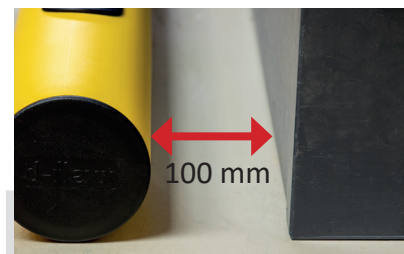

Article description	Kerb Barrier 500 mm
Item number	DFKB-5
EAN	4250912395787
Customs tariff number	39269097



Height	140 mm
Width	140 mm
Length	500 mm
Diameter	140 mm
Deflection zone	100 mm

Net weight	3,2 kg
Material	Polyethylene
Color	Yellow (like RAL 1023 traffic yellow) / black
Indoor use	Yes
Outdoor use	Yes
Boreholes	2

Fixing	The fixing material is included. The Fischer ULTRACUT FBS II is the perfect powerful concrete screw for top installation comfort.
---------------	---

Fixing dimensions	M12X85
--------------------------	--------



Material Properties

Chemical Resistance	high- ISO/TR 10358
Temperature Range	-10° up to + 50°

Environment

Recyclability	100%
---------------	------

Other

Standard Warranty	5 years
-------------------	---------

